

# Ceiling Loudspeaker

## TSG-CP12

### 12W Ceiling Loudspeaker

**6" Full range speaker | Good speech and music reproduction | Powder coated mesh grille and ABS frame**

Ceiling-mounted PA loudspeakers is designed for applications which require the minimum size at the maximum sound quality. Their parameters have been carefully selected to match the operating requirements in the rooms exposed to after-sound and high-humidity. The Speaker is an economical ceiling loudspeaker for general purpose applications. It is a full range loudspeaker for speech and music reproduction in shops, department stores, schools, offices, stadium, hotels, and restaurants.

### Technical Specifications

**MODEL** TSG-CP12

#### Electrical


Rated power/Max. Power, W	12/18
Tappings 100 V line, W	12/6/3
Frequency range(-10dB), Hz	60 - 15000
SPL @ 1W, @(1Khz,1m), dB	93
Speaker unit size	6"
Dispersion Angle	170 deg

#### Mechanical


Dimensions, mm	205(OD) X 70(H)
Color	White
Weight, Kg	0.680
Material	ABS with metal grille
Mounting	Spring clamp



**Circuit Diagram**

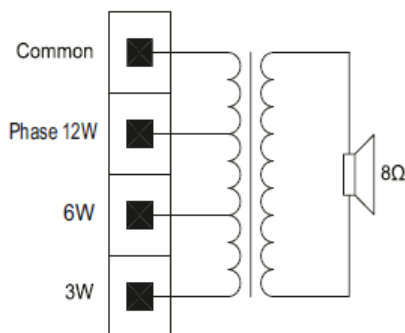

**Frequency Response**

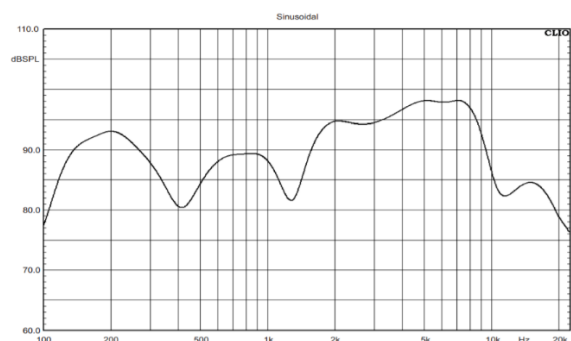

For more information, contact [techsupport@tsgaudioinnovation.com](mailto:techsupport@tsgaudioinnovation.com)